



PS1243.4

The ZP720-2 analogue thermal sensor is a thermistor controlled device which responds to changes in its ambient temperature. The device provides a reliable response to fires in areas where environmental conditions may prohibit the use of smoke sensors.

The sensitivity of each sensor is set by the ZP control panel and can be adjusted between four levels - from 58°C to 75°C either manually or, automatically on a timed basis. At sensitivity level two, the ZP720-2 fully meets the requirements of European Standard EN 54 Pt 5 (grade 1) and is approved by several international approval bodies.

Up to 127 sensing devices can be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be given a unique address, which is polled by the panel every two seconds.

Temperature levels are continuously sensed by the unit and transmitted via the ZP wiring loop as electronic signals, which are assessed and verified by the control panel prior to any alarm decision being taken.

Sensor sensitivity, calibration and self test are carried out automatically by the ZP3 system. Removal or replacement of an incorrect sensing device will be identified by the system and shown as a fault.

Whilst effective in operation the ZP720-2 is unobtrusive when installed. The low profile moulding together with either surface or recessed bases makes the unit ideal for both commercial and industrial interiors. A red LED indicator situated on the sensor moulding, flashes to indicate when the unit is in alarm.

For ease of removal sensors plug into a range of base units by a simple twist and lock action. A site selectable option is provided to lock the sensor into its base. Once applied the unit can only be removed by means of a special tool.

Space for address labels is provided on sensor and base mouldings - ensuring units are replaced in their correct location and address numbers can be identified from floor level.




ZP720-2

Analogue Thermal Sensor

- **Analogue sensing - reduces false and unwanted alarms**
- **Addressable - system knows the status and location of every sensor**
- **Automatic self test**


Dimensions

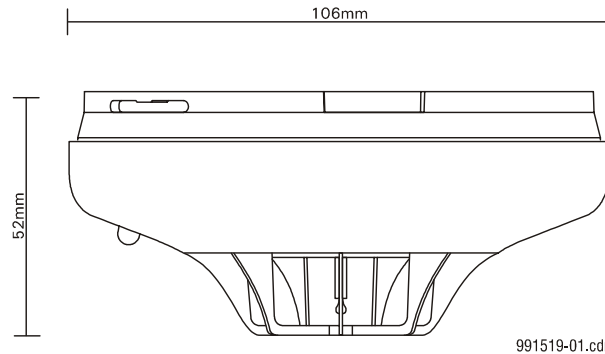

991519-01.cdr

Note: Dimensions shown without base.

Wiring Diagram

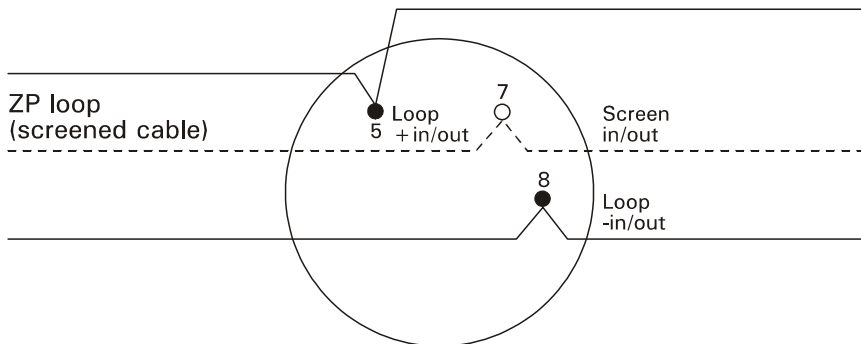

ZP7-SB1 / ZP7-RB1
 Sensor base

Note: Remote LED should be connected between terminals +2 and -3

99071800-0-01

Specification



Model No.	ZP720-2
Specification	EN54 Pt5
Compatibility	All ZP analogue systems
Sensitivity	Level 1 58°C fixed temperature Level 2 58°C rate compensated Level 3 75°C rate of rise Level 4 75°C fixed temperature
Mounting	Plugs into surface or semi recessed base
Area Coverage	50m ² , subject to local codes
Wiring	2 core loop or spur
Monitoring:	Open and short circuit fault. Sensor removal and device type.
Indication	Alarm LED (red)
Operating voltage	Address line pulsed 20V (19.5V to 20.5V). Max line less 4V
Operating temp	58°C to 75°C (4 software settings)
Current (quiescent)	600µA
Current (alarm)	700µA
Addressing method	7 way DIP switches in head

Environmental:	
Application	Indoor use
EN60529 rating	IP32
Temp range	-10°C to +75°C
Humidity range	20% to 95% RH (non condensing)
EMC	CE marked (EEC89/336)
Construction:	
Material	Moulded ABS
Dimensions	106mm (dia) x 52mm (h) (excluding base)
Height	From ceiling with base: ZP7-SB1 surface base - 60mm ZP7-RB1 recessed based - 38mm
Colour	White
Weight	85g (without base)

Ziton
 8 Newmarket Court Chippenham Drive Kingston Milton Keynes MK 10 0AQ United Kingdom
 Telephone +44 (0) 1908 281981 Fax +44 (0) 1908 282554 email zitonuk@ziton.spx.com

Ziton (Pty) Ltd
 Ziton House 555 Voortrekker Road Maitland 7405 PO Box 181 Maitland 7404 South Africa
 Telephone +27 (0)21 506 6000 Fax +27 (0)21 506 6100 email zitonsa@ziton.spx.com

Copyright © Ziton
 Ziton reserves the right to change specifications without notice in order to improve products or manufacturing methods. Although every effort is made to avoid errors, we reserve the right to correct typographical, photographic, clerical or printing errors.